




335 Premium Flexible Adhesive

DS-1037-1113

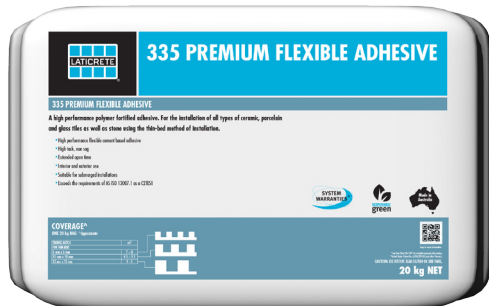

1. PRODUCT NAME

335 Premium Flexible Adhesive

2. MANUFACTURER

LATICRETE Pty Ltd.
29 Telford Street
Virginia, QLD 4014 Australia

Telephone: 07 3865 1599
Toll Free: 1800 331 012
Fax: 07 3865 2250
Internet: www.laticrete.com.au

3. PRODUCT DESCRIPTION

335 Premium Flexible Adhesive is a high performance bagged cementitious powder to be mixed with water to install low absorption ceramic tile, porcelain tile and natural stone using the thin-set method of installation.

Uses

Excellent for exterior and underwater applications. Superior bond to masonry. The ultimate thin-set adhesive for porcelain and glass tile.

Advantages

- Interior and exterior use
- High performance flexible cement based adhesive.
- High tack, non sag.
- Extended open time
- Easy to use – Plastic and workable.

Suitable Substrates

- Concrete
- Concrete masonry
- Cement mortar beds
- Cement plaster
- Ceramic tile and stone
- Brick masonry

- Cement backer board**
- Cement terrazzo
- Gypsum wallboard*
- Suitable waterproof membrane

* Interior use only

** Consult cement backer board manufacturer for specific installation recommendations and to verify acceptability for use

Packaging

20 kg bag; 56 bags per pallet

Available Colours

Off-White and White

Approximate Coverage

(Based on product wet densities with a trowel at 45°)

7 – 8 m² with a 6 mm x 6 mm notched trowel

4.5 – 5.5 m² with a 10 mm x 10 mm notched trowel

Shelf Life

Factory sealed containers of the 335 Premium Flexible Adhesive are guaranteed to be of first quality for one (1) year* if stored off the ground in a dry area.

* High humidity will reduce the shelf life of the bagged product

Limitations

- Use LATAPOXY® 300 Adhesive for installing green marble or water sensitive stone, agglomerates or tile.
- Use white adhesive for installing white or light coloured marble or stone.
- Not for use over carpet adhesive, vinyl tile cutback adhesive or plastic laminates.
- Not for direct use over hardwood or strip wood flooring, particle board, Luan plywood or Masonite®.
- Not for use over expansion joints or structural movement cracks.
- Adhesives/mastics, mortars and grouts for ceramic tile, pavers, brick and stone are not replacements for waterproof membranes. When a waterproof membrane is required, use a LATICRETE Waterproof Membrane.
- **Note:** Surfaces must be structurally sound, stable and rigid enough to support ceramic/stone tile, thin brick and similar finishes. Substrate deflection under all live, dead and impact loads, including concentrated loads, must not exceed L/360 for thin bed ceramic tile/brick installations or L/480 for thin bed stone installations where L=span length.

Cautions

- During cold weather, protect finished work from traffic until fully cured.
- Keep out of reach of children.
- Contains Portland cement and silica sand. May irritate eyes and skin. Avoid contact with eyes or prolonged contact with skin. In case of contact, flush thoroughly with water. Use rubber gloves and eye protection when handling product.

- Do not take internally. Silica sand may cause cancer or serious lung problems. Avoid breathing dust. Wear an approved respirator in dusty areas.
- Efflorescence is a normal condition of Portland cement. Contact LATICRETE for information on reducing the effects of efflorescence.

4. TECHNICAL DATA

VOC

Green Building Council of Australia Green Star Office Design V3 IEQ-13

VOC: 4 grams/litre

Performance Properties

When tested in accordance with AS4992.1&2 is classified as a C2TES1

Test Method	Result
28-day Tensile Strength – AS4992	1.5 MPa
Water Immersion – AS4992	1.5 MPa
Heat Ageing – AS4992	1.5 MPa
Transverse Deformation – AS4992	2.5 mm

Working Properties at 21°C

Property	Value
Open Time	30 minutes
Pot Life	4 hours
Time to Light Traffic	8 – 10 hours
Wet Density	1710 kg/m ³

Specifications subject to change without notification. Results shown are typical but reflect test procedures used. Actual field performance will depend on installation methods and site conditions.

5. INSTALLATION

Unless otherwise stated in this document, all work should be in accordance with AS3958.1-2007.

Preparation

All surfaces should be between 4°C and 32°C and structurally sound, clean and free of all laitance, dirt, oil, grease, loose peeling paint, concrete sealers or curing compounds. Rough or uneven concrete surfaces should be made smooth with a LATICRETE Latex Portland Cement underlayment to provide a wood float (or better) finish. Dry, dusty concrete slabs or masonry should be dampened and excess water swept off. Installation may be made on a damp surface. New concrete slabs shall be cured and 28 days old before application. Latex Portland cement mortars do not require a minimum cure time for cement slabs. All slabs must be plumb and true to within 5 mm in 3 m. Expansion joints shall be provided through the tile work, over all construction or expansion joints in the substrate. Follow Australian Standards requirements for Expansion Joints in AS3958.1 Section 5.4.5 and AS3958.2 Section 4.5 or TCNA detail EJ-171 “Movement Joints – Vertical & Horizontal”. Do not cover expansion joints with adhesive.

Mixing

Place potable water into a clean pail and add 335 Premium Flexible Adhesive powder. Mix by hand or with a slow speed mixer to a smooth, trowelable consistency. Use approximately 5.5 litres of water per 20 kg bag. Allow adhesive to slake for 5 – 10 minutes. Remix without adding any more water or powder.

Application

Apply adhesive to the substrate with the flat side of the trowel, pressing firmly to work into surface. Comb on additional adhesive with the notched side.

Note: Use the proper sized notched trowel to insure full bedding of the tile. Spread as much adhesive as can be covered with tile in 10 – 15 minutes or whilst adhesive is wet and tacky. Back butter large tiles 200 mm x 200 mm to provide full bedding and firm support if required. Place tiles into wet, sticky adhesive and beat in using a beating block and rubber mallet to imbed tile and adjust level. Check adhesive for complete coverage by periodically removing a tile and inspecting bedding adhesive transfer onto back of tile. If adhesive is skinned over (not sticky), remove and replace with fresh adhesive.

Grouting

Grout after a minimum of 24 hours curing at 21°C using PERMACOLOR® Grout; or, LATICRETE Sanded Grout and LATICRETE Smooth Grout mixed with LATICRETE 1776 Grout Enhancer. For maximum stain resistance use SPECTRALOCK® PRO Grout.

Cleaning

Clean tools and tile work with water while adhesive is fresh.

Tile on Tile work

Existing ceramic tile must be firmly bonded to rigid floor construction. Tiled surfaces to receive tile must be prepared; shiny and highly glossed glazes should be removed by scarification; always cleaned to remove grease, wax, oil or any other contamination that will inhibit bond; cleaned with alkaline solutions like Tri-sodium Phosphate (TSP) or electric dishwasher powder and hot water after surface preparation (follow cleaning agent manufacturers safe use instructions) as required and rinsed with clean water and allowed to dry after cleaning.

Apply a continuous skim coat of adhesive, nominally 1.5 mm thick before combing additional adhesive over the skim coat using the appropriate sized trowel.

6. AVAILABILITY AND COST

Availability

LATICRETE and LATAPOXY® materials are available worldwide.

For Distributor information:

Toll Free: 1800 331 012
Telephone: 07 3865 1599

For online Distributor information, visit LATICRETE at www.laticrete.com.au

Cost

Contact a LATICRETE Distributor in your area.

7. MAINTENANCE

LATICRETE and LATAPOXY grouts require routine cleaning with a neutral pH soap and water. All other LATICRETE and LATAPOXY materials require no maintenance but installation performance and durability may depend on properly maintaining products supplied by other manufacturers.

8. TECHNICAL SERVICES

Technical assistance

Information is available by calling

Toll Free: 1800 331 012
Telephone: 07 3865 1599
Fax: 07 3865 2250

Technical and safety literature

To acquire technical and safety literature, please visit our website at www.laticrete.com.au

9. DISCLAIMER

- The information contained in this document is given in good faith and to the best of our knowledge is true and accurate.
- This information is subject to change without notice and it is the responsibility of the user to obtain up to date and current information.
- The use of this product is beyond our control and liability is assumed by the user when used incorrectly and not in accordance with LATICRETE guidelines.
- The manufacturer is not responsible for any loss or damage arising from incorrect usage of this product.
- The specifier or other party responsible for the project must ensure that the details in this data sheet are appropriate for the intended application and that additional detailing is performed for specific design or any areas that fall outside the scope of this specification.
- Efflorescence is a normal condition of Portland cement and is not covered by any warranty. The use of LATAPOXY® 310 Stone Adhesive, LATAPOXY 300 Adhesive, SPECTRALOCK® PRO Grout and SPECTRALOCK 2000 IG will not contribute to any noticeable efflorescence.

LATICRETE Pty Ltd
29 Telford Street
Virginia, QLD 4014
Australia
1800 331 012
www.laticrete.com.au

©2013 LATICRETE Pty Ltd
All trademarks shown are the intellectual properties of their respective owners.